

3LH

LOW HARMONIC

CONFIGURED PANEL



Physical / Environmental

Operating Temperature Range	-40 °C – 50 °C (-40 °F – 122 °F) *Heater in enclosure is required below -18 °C and 0 °F, de-rating required above 40 °
Storage Temperature Range	-40 °C – 57 °C (-40 °F – 135 °F)
Enclosure	NEMA Type 3R: Outdoor Rainproof
Altitude	Altitude Derate by 1% every 400 ft above 3300 ft elevation

Input Power

Input Phase	Single-phase or Three-phase
Input Voltage	230V 460V
Input Voltage Range	190V – 264V 440V – 520V
Input Frequency	50/60 Hz

Output Power

Output Phase	Three-phase
Nominal Output Voltage	230V 460V
Output Voltage Range	100V – 270V 200V – 530V
Output Frequency	5 Hz – 120 Hz
Horsepower	5 HP - 500 HP
Output Power	1.5 - 409 kW
Switching Frequency	2 kHz – 5 kHz
Output	V/f control or torque Control (Optional)

Electrical

Short Circuit Withstand Rating	65 kA RMS symmetrical Amps
Efficiency	> 98%
Startup Ramp Time	1 – 120 s
Shutdown Ramp Time	1 – 120 s or Coast to Stop
Overload Capacity	110% for 60 s



Analog Inputs

Quantity	(3) Programmable
Current Reference	4 – 20 mA, (2) Inputs
Voltage Reference	0 – 10 VDC, (1) Input
Terminal Block Size	26 - 12 AWG

Digital Inputs

Quantity	(4) Programmable
Ratings	< 5 V, galvanically isolated
Terminal Block Size	26 - 12 AWG

Relay Outputs

Quantity	(4) Programmable
Rating	Relay 1 : 30 VDC or 277 VAC, 10 A Relay 2 : 30 VDC or 277 VAC, 10 A Relay 3 : 30 VDC, 2 A or 125 VAC, 0.5 A Relay 4 : 30 VDC, 2 A or 125 VAC, 0.5 A
Terminal Block Size	26 - 12 AWG

Features

Low Harmonic Compliance	IEEE-519 Guaranteed
Certification	ETL listed to UL 61800-5-1 and CSA C22.2 No. 274-17
User Interface	Push button membrane keypad with backlit graphic display



230V

230V

Model / Part Number	HP	Rated Current (Input)	Rated Current (Output)	Enclosure	Enclosure (w/ Bypass)
3LH005	5	18 A	18 A	ENC3	-
3LH007	7.5	24 A	24 A	ENC3	-
3LH010	10	31 A	31 A	ENC3	-
3LH015	15	46 A	46 A	ENC3	-
3LH020	20	61 A	61 A	ENC3	-
3LH025	25	75 A	75 A	ENC3	-
3LH030	30	91 A	91 A	ENC3	-

Voltage Doubling

Voltage Doubling

Model / Part Number	HP	Rated Current (Input)	Rated Current (Output)	Enclosure	Enclosure (w/ Bypass)
3LH205	5	18 A	9 A	ENC3	-
3LH207	7.5	24 A	13 A	ENC3	-
3LH210	10	30 A	18 A	ENC3	-
3LH215	15	46 A	25 A	ENC3	-
3LH220	20	61 A	31 A	ENC3	-
3LH230	30	91 A	46 A	ENC5	-
3LH240	40	121 A	61 A	ENC5	-
3LH250	50	142 A	77 A	ENC5	-
3LH260	60	172 A	91 A	ENC6	-
3LH275	75	198 A	107 A	ENC6	-



460V

460V

<i>Model / Part Number</i>	<i>HP</i>	<i>Rated Current (Input)</i>	<i>Rated Current (Output)</i>	<i>Enclosure</i>	<i>Enclosure (w/ Bypass)</i>
3LH405	5	9 A	9 A	ENC3	-
3LH407	7.5	13 A	13 A	ENC3	-
3LH410	10	18 A	18 A	ENC3	-
3LH415	15	25 A	25 A	ENC3	-
3LH420	20	31 A	31 A	ENC3	ENC5
3LH425	25	38 A	38 A	ENC3	ENC5
3LH430	30	46 A	46 A	ENC3	ENC5
3LH440	40	61 A	61 A	ENC3	ENC5
3LH450	50	77 A	77 A	ENC3	ENC5
3LH460	60	91 A	91 A	ENC5	ENC6
3LH475	75	107 A	107 A	ENC5	ENC6
3LH4100	100	142 A	142 A	ENC5	ENC6
3LH4125	125	172 A	172 A	ENC5	ENC6
3LH4150	150	198 A	198 A	ENC5	ENC6
3LH4200	200	250 A	250 A	ENC6	ENC6
3LH4250	250	304 A	304 A	ENC6	ENC6
3LH4300	300	362 A	362 A	ENC6	ENC6
3LH4350	350	415 A	415 A	ENC7A	-
3LH4400	400	478 A	515 A	ENC7A	-
3LH4500	500	590 A	590 A	ENC7A	-



230V

230V

Model / Part Number	HP	Fuse Rating (Recommended)	Circuit Breaker Rating (Recommended)
3LH005	5	30 A, 600 V	30 A
3LH007	7.5	30 A, 600 V	30 A
3LH010	10	40 A, 600 V	40 A
3LH015	15	60 A, 600 V	60 A
3LH020	20	80 A, 600 V	80 A
3LH025	25	100 A, 600 V	100 A
3LH030	30	125 A, 600 V	125 A

Voltage Doubling

Voltage Doubling

Model / Part Number	HP	Fuse Rating (Recommended)	Circuit Breaker Rating (Recommended)
3LH205	5	30 A, 600 V	30 A
3LH207	7.5	30 A, 600 V	30 A
3LH210	10	40 A, 600 V	40 A
3LH215	15	60 A, 600 V	60 A
3LH220	20	80 A, 600 V	80 A
3LH230	30	125 A, 600 V	125 A
3LH240	40	175 A, 600 V	175 A
3LH250	50	225 A, 600 V	225 A
3LH260	60	275 A, 600 V	275 A
3LH275	75	325 A, 600 V	325 A




460V

460V


Model / Part Number	HP	Fuse Rating (Recommended)	Circuit Breaker Rating (Recommended)
3LH405	5	20 A, 600 V	20 A
3LH407	7.5	20 A, 600 V	20 A
3LH410	10	30 A, 600 V	30 A
3LH415	15	30 A, 600 V	30 A
3LH420	20	40 A, 600 V	40 A
3LH425	25	50 A, 600 V	50 A
3LH430	30	60 A, 600 V	60 A
3LH440	40	80 A, 600 V	80 A
3LH450	50	100 A, 600 V	100 A
3LH460	60	125 A, 600 V	125 A
3LH475	75	150 A, 600 V	150 A
3LH4100	100	200 A, 600 V	200 A
3LH4125	125	250 A, 600 V	250 A
3LH4150	150	250 A, 600 V	250 A
3LH4200	200	350 A, 600 V	350 A
3LH4250	250	400 A, 600 V	400 A
3LH4300	300	500 A, 600 V	500 A
3LH4350	350	600 A, 600 V	600 A
3LH4400	400	700 A, 600 V	700A
3LH4500	500	800 A, 600 V	800 A




ENC2

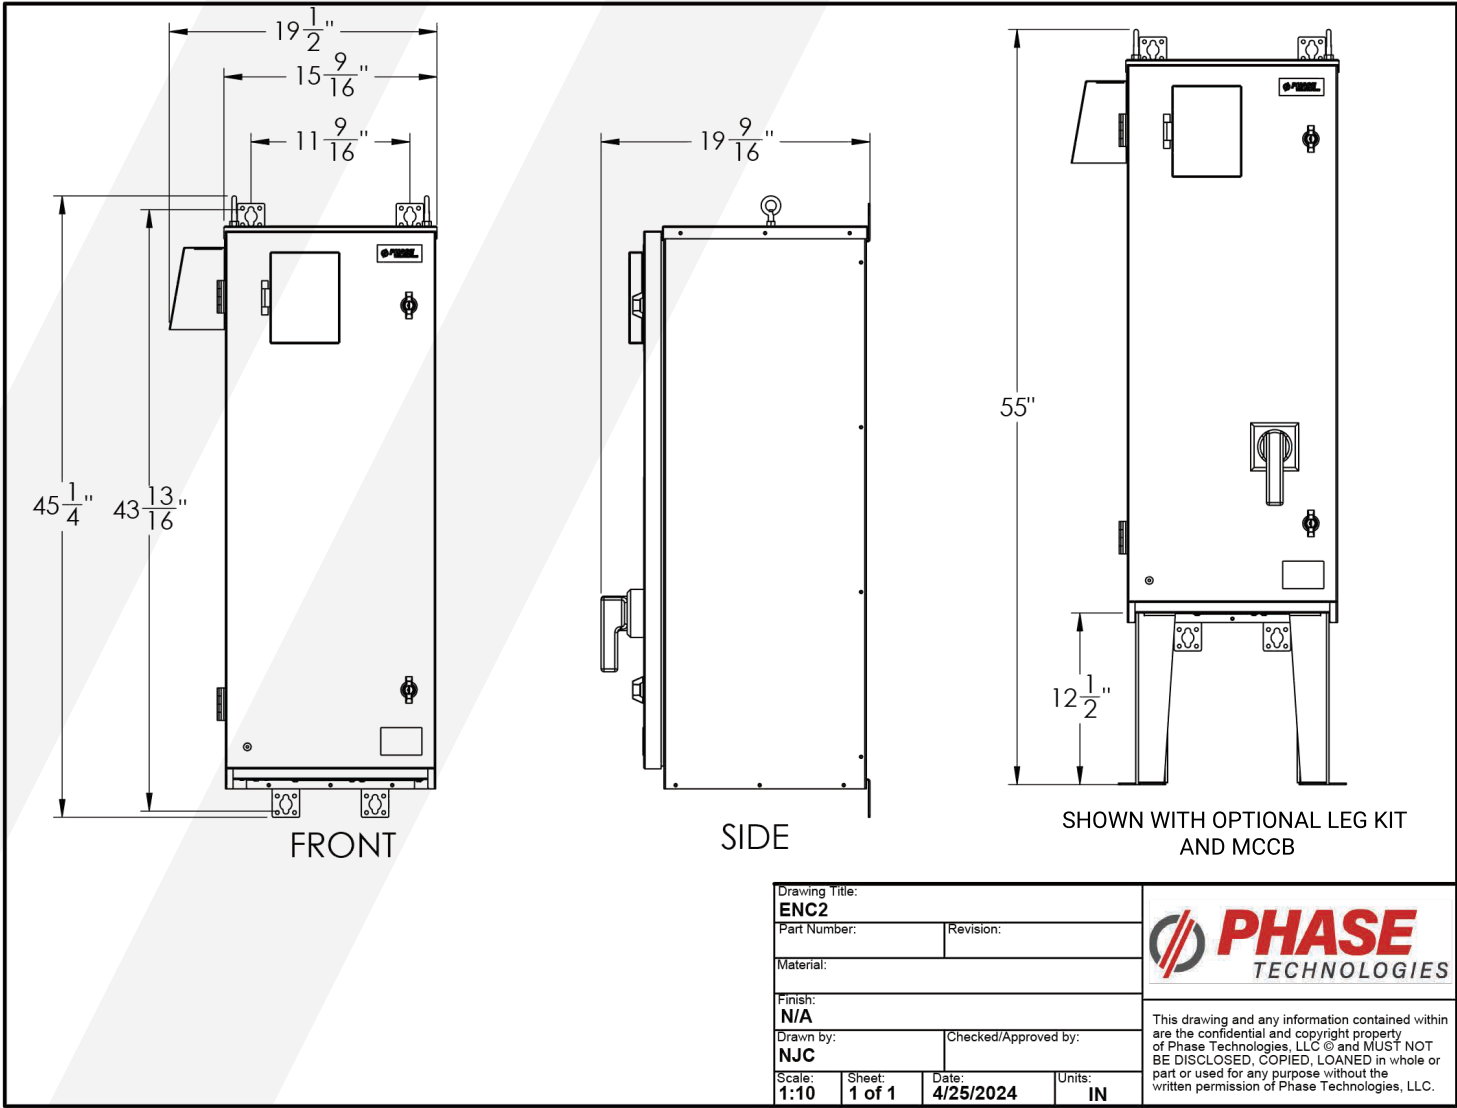


ENC3

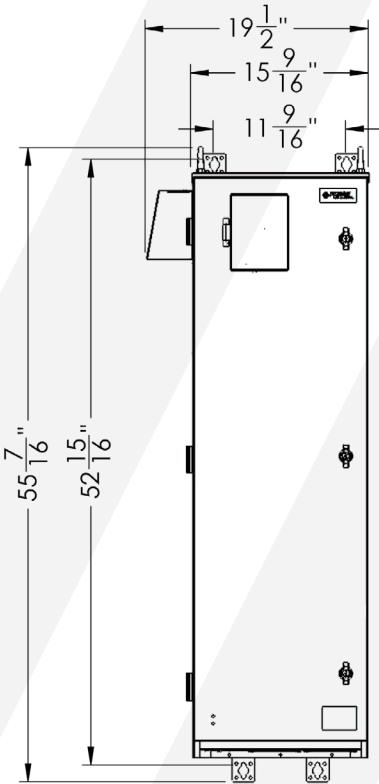


FRONT

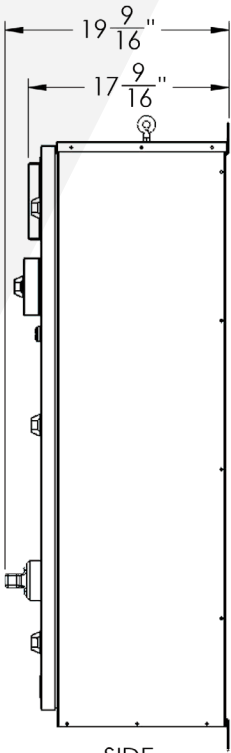

SIDE

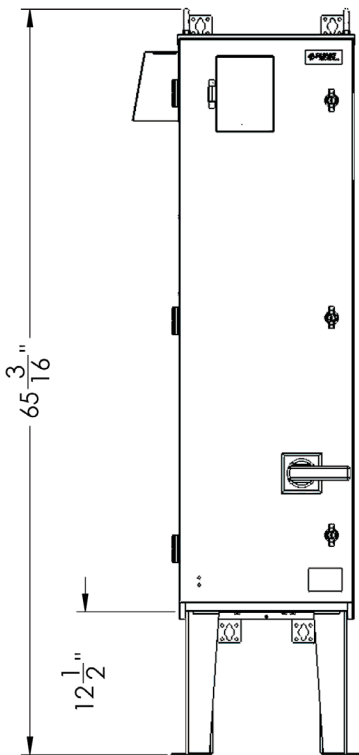

SHOWN WITH OPTIONAL LEG KIT
AND MCCB




Drawing Title: ENC3			
Part Number:		Revision: 0	
Material: N/A			
Finish: N/A			
Drawn by: OH		Checked/Approved by:	
Scale: N/A	Sheet: 1 of 1	Date: 12/18/2023	Units: IN




This drawing and any information contained within are the confidential and copyright property of Phase Technologies, LLC © and MUST NOT BE DISCLOSED, COPIED, LOANED in whole or part or used for any purpose without the written permission of Phase Technologies, LLC.




ENC4A

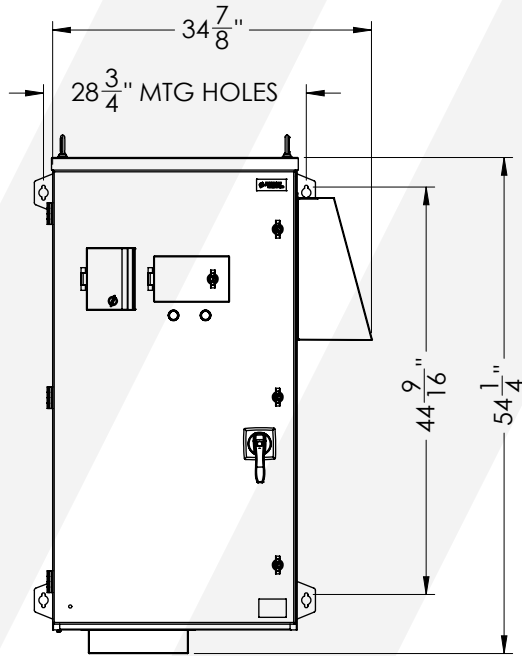


FRONT

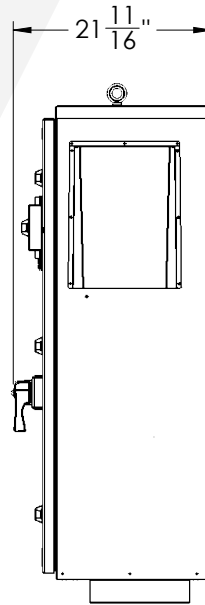

SIDE

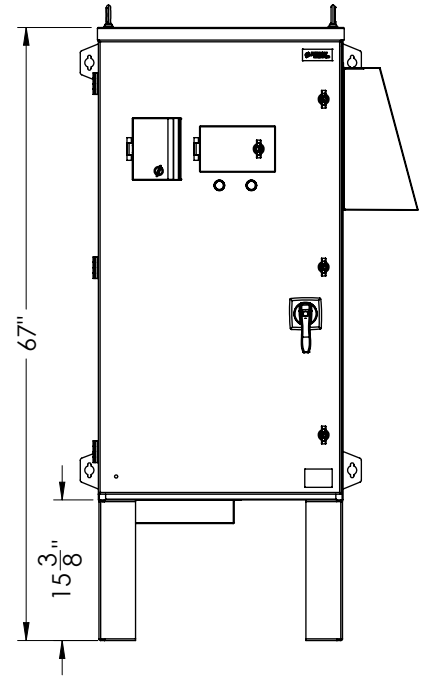

OPTIONAL LEG KIT



UNLESS OTHERWISE SPECIFIED:
NO DIM. ± 0.060 " TO MODEL
FRACTIONAL $\pm 1/16$ "
0.XX: ± 0.06 " 0.XXX: ± 0.020 "
ANGLES: $\pm 1^\circ$
HOLE ϕ : ± 0.003 " TO MODEL
HOLE ϕ : ± 0.010 " TO MODEL
WELD: ANSI STANDARD

MASS = 0.000lb

Drawing Title:

ENC4A Standard Enclosure

Part Number:

Revision:

0

Material:

Finish:

N/A

Drawn by:

JLT

Checked/Approved by:

Scale:

1:15

Sheet:

1 of 1

Date:

11/26/2024

Units:


IN

PHASE
TECHNOLOGIES


This drawing and any information contained within are the confidential and copyright property of Phase Technologies, LLC © and MUST NOT BE DISCLOSED, COPIED, LOANED in whole or part or used for any purpose without the written permission of Phase Technologies, LLC.




ENC5

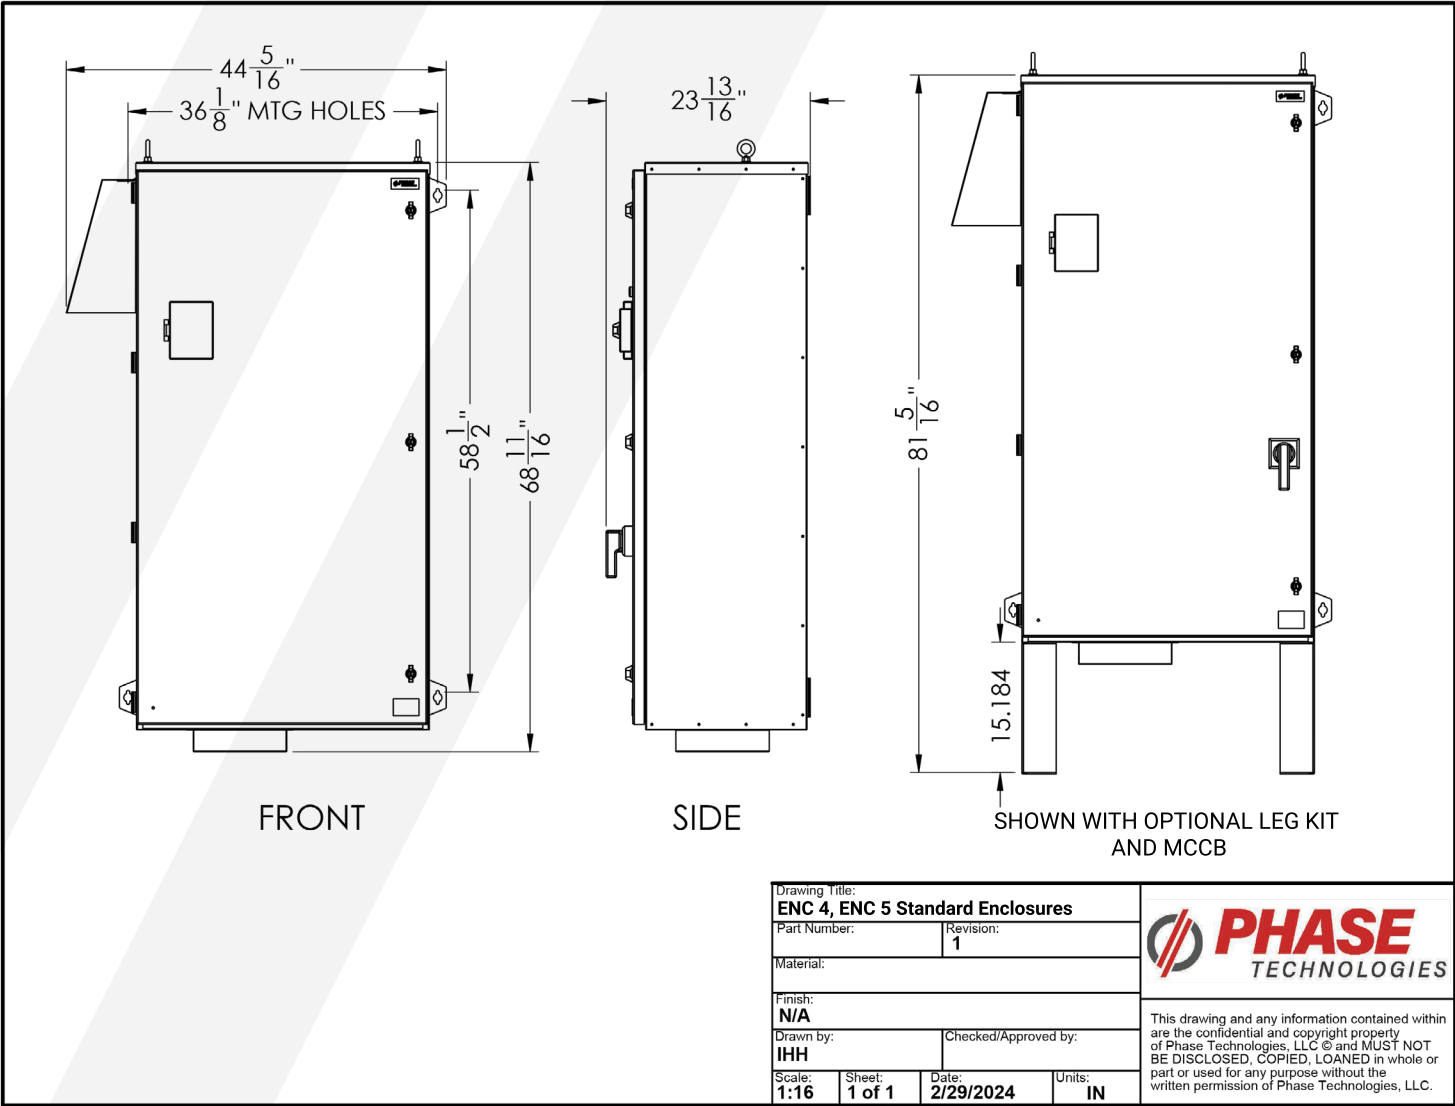

ENC6

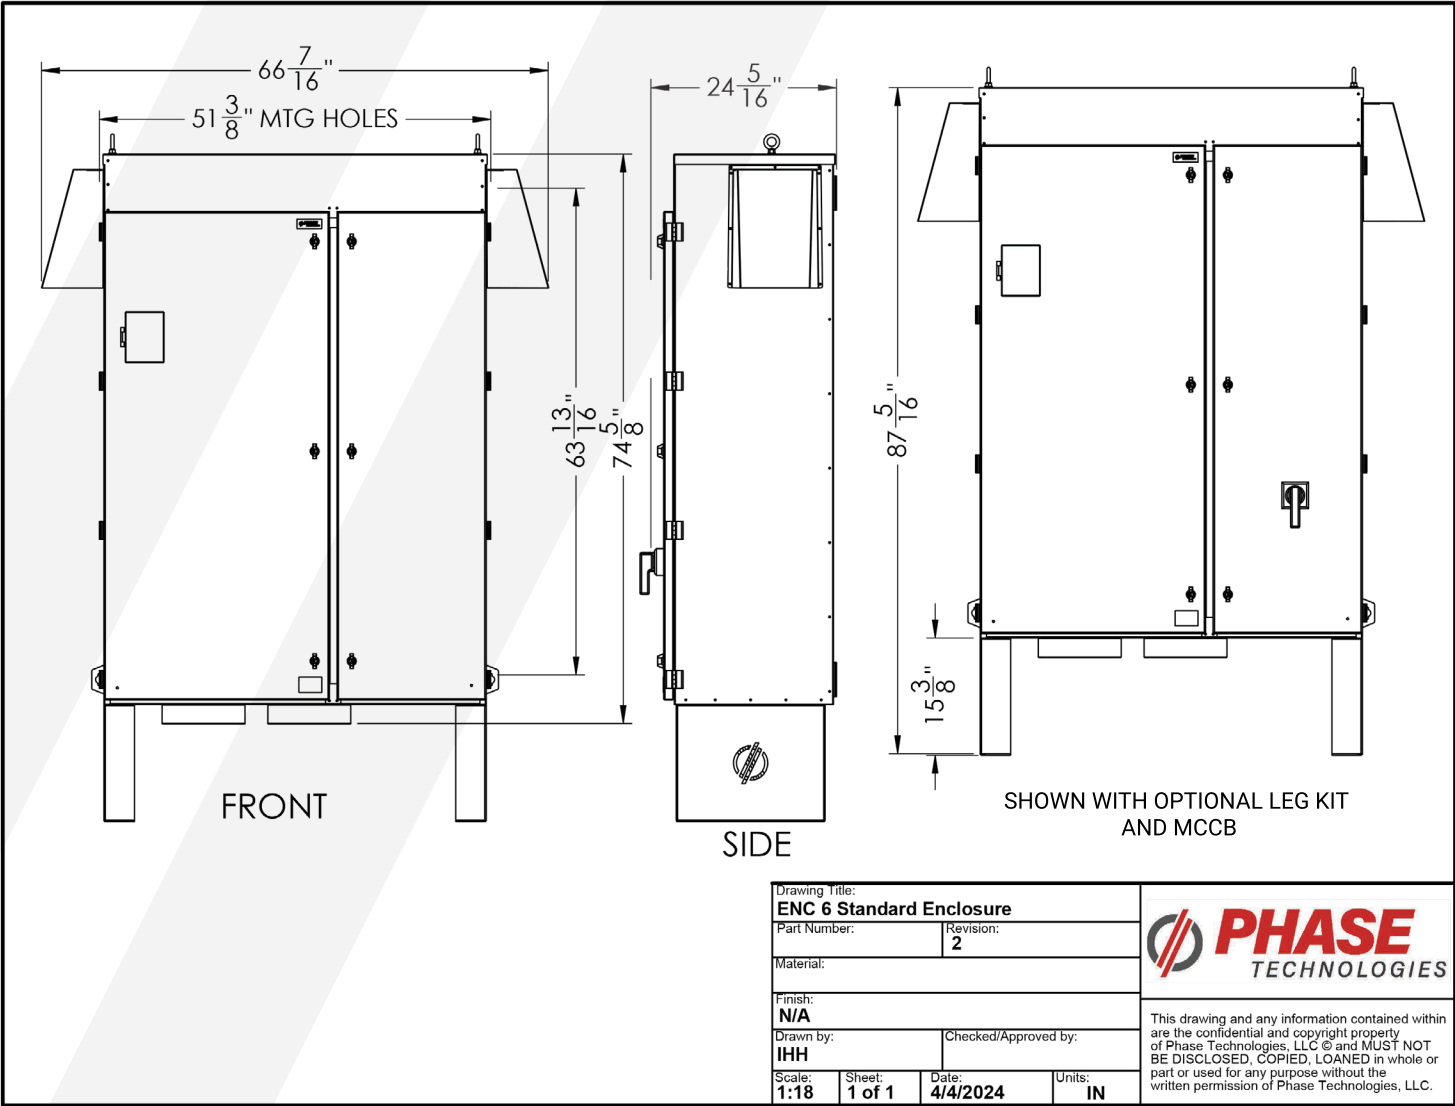

ENC7A

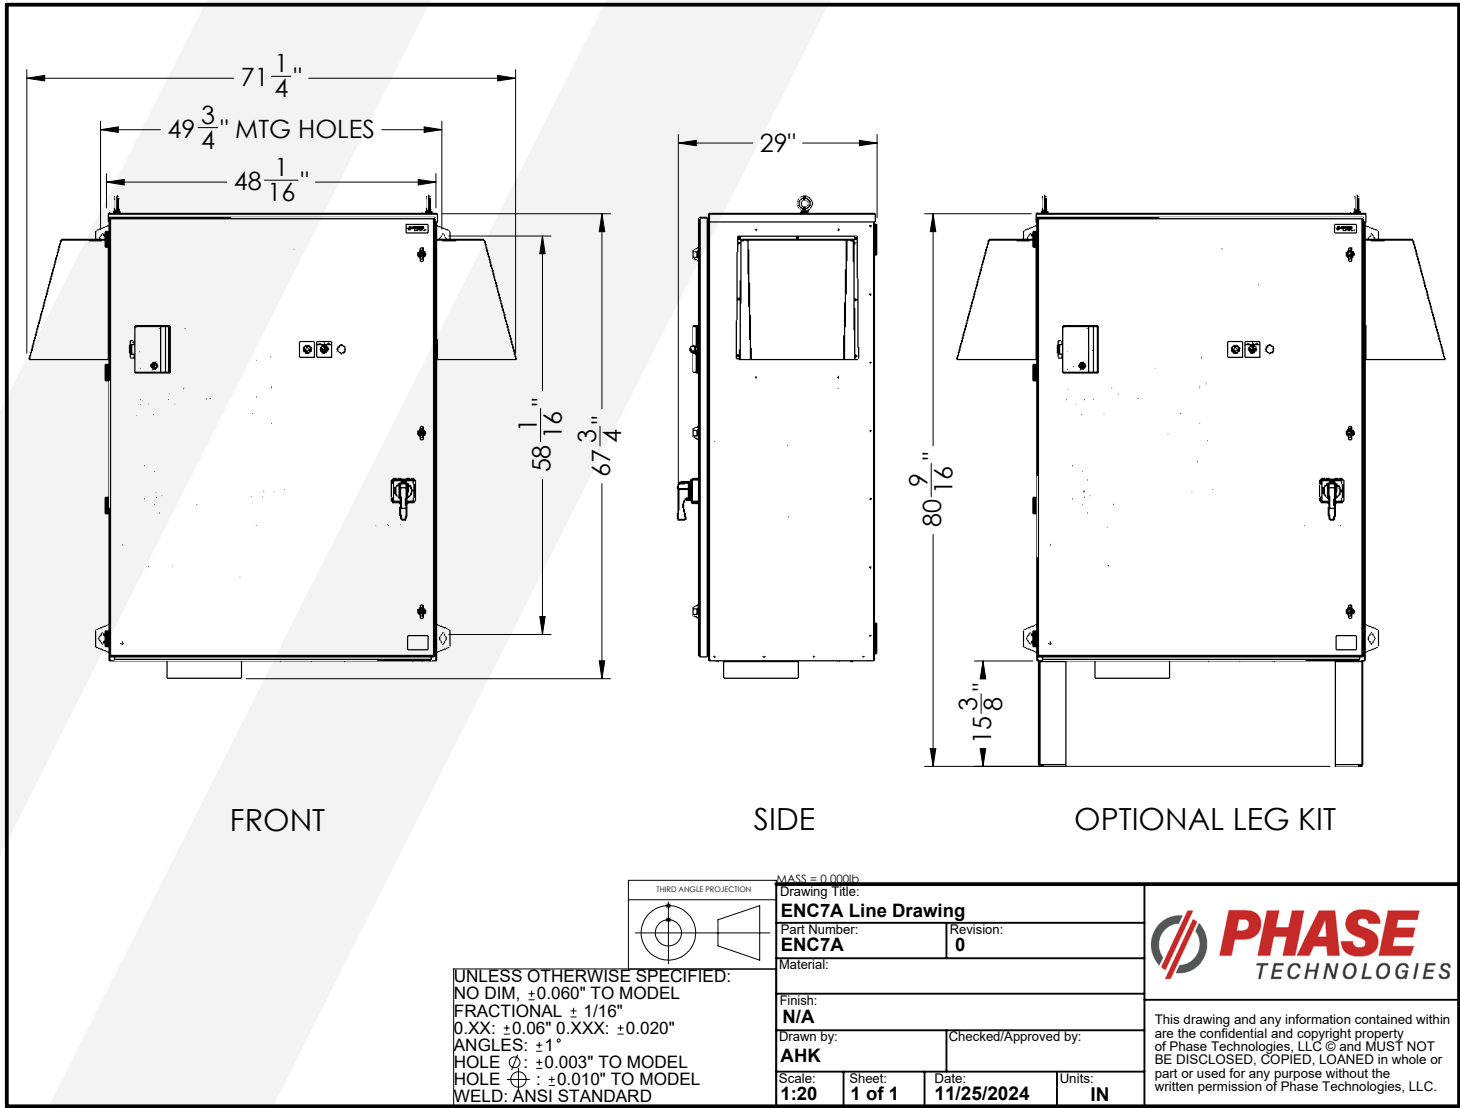

INTUITIVELY ENGINEERED



**DIGITAL PHASE
CONVERTERS**

**VARIABLE
FREQUENCY
DRIVES**

**MOTOR
PROTECTION**

**STARTER
PANELS**

OUR MISSION

Relentlessly seek to provide Uncommon Value, solutions, innovation, and support for the industries that we serve.

